

## Immersion Soak 10L 40KHz 240W Bench Top Ultrasonic Cleaner

Our Product Introduction

for more products please visit us on [skymenultrasonic.com](http://skymenultrasonic.com)

### Basic Information

- Place of Origin: China
- Brand Name: SKYMEN
- Certification: CE, RoHS, FCC, REACH
- Model Number: 040S
- Minimum Order Quantity: 1
- Price: Negotiation
- Packaging Details: Carton box
- Delivery Time: In Stock
- Payment Terms: T/T
- Supply Ability: 5000pcs per month



### Product Specification

- Model: 040S
- Capacity: 10L
- Certification: CE, RoHS, FCC, ISO
- Cleaning Type: Immersion / Soak
- Internal Tank Size: 300\*240\*150cm
- Transducer: 4pcs
- Ultrasonic Power: 240W
- Heating Power: 200W
- Materials: Stainless Steel 304
- Tank Capacity: 10L
- Timer: 0-30 Minutes Adjustable
- Highlight: 40KHz Bench Top Ultrasonic Cleaner, 240W Bench Top Ultrasonic Cleaner, 10L Stainless Steel Ultrasonic Cleaner



### More Images



## Product Description

Stainless Steel Tank digital bench top Ultrasonic Cleaner 10 Liter Removing Rust Grease

Specification:

Ultrasonic Frequency	40KHz
Material	Stainless Steel SUS304
Tank Capacity	10L
Timer	1-30minutes , Digital timer
Heater	20°C to 80°C adjustable
Power Supply	AC 220 ~ 240V, 50 Hz
Ultrasonic Power	240W
Heating Power	200 W, Digital Heating
Tank Size	300 x 240 x 150 mm ( L x W x H )
Unit Size	380x 290x 280 mm ( L x W x H )
Package Size	440 x 365x 360 mm ( L x W x H )
N.W.	7.5 kg
G.W.	8.5 kg

Features:

- Digital Control display
- More convenient for operation
- Stainless steel tank has resistance to wear and long work life.
- Tank capacity: 6.5L
- Digital timer, clear digital LCD display
- With Stainless steel basket
- Use just tap water, or industrial solvent cleaner for more higher cleaning requirement
- Industrial control chip microcontroller.flexible circuit boards control, more secure & stable

### Stainless Bench Top

Model	Capacity	Tank Size	Ultrasonic Power	Heating Power	Frequency
	(L)	(L*W*H)mm	(W)	(W)	(KHz)
008	0.8	150*85*65	35	0	40
009	0.9	150*135*65	60	100	40
010T	2	150*165*100	60	100	40
020S	3.2	240*135*100	120	100	40
030S	4.5	300*150*100	180	200	40
031S	6.5	300*150*150	180	200	40
040S	10	300*240*150	240	200	40
060S	15	330*300*150	360	300	40
080S	22	500*300*150	480	500	40
100S	30	500*300*200	600	500	40

Products details:

## PRODUCT DETAIL

SKYMEN specialize in ultrasonic cleaners manufacturing since 2007, Professional team, quality assurance



1

### Cooling vents


Quickly cool the internal components of the machine, protecting the circuit board.

2



### Insulation handle

Insulation handle design, anti-static, anti-high temperature, not slippery hand, more secure.

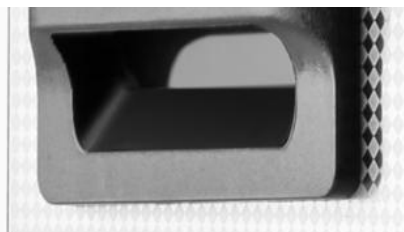

3

### Double insurance

Independent switch operation safety, built-in spare fuse, double insurance.

4

### SUS304 tank

Thickness 1.1mm, heat-resisting and corrosion-resisting, safety and health



5

### Drain valve

The drain valve is made of high quality stainless steel, corrosion-resistant and switch adjustable

6

### Non-slip pad

Non-slip anti-shock pad, place all surfaces without sliding



**Industrial Ultrasonic Cleaning Machine**



Model	Capacity (L)	Tank Size (L*W*H)mm	Transducers (pcs)	Ultrasonic Power (W)	Heating Power (W)	Frequency (KHz)
JP-120ST	38	500X300X250	12	600	1500	28/40
JP-180ST	53	500X350X300	18	900	1500	28/40
JP-240ST	77	550X400X350	24	1200	3000	28/40
JP-300ST	99	550X450X400	30	1500	3000	28/40
JP-301ST	99	800X300X400	30	1500	3000	28/40
JP-360ST	135	600X500X450	36	1800	4500	28/40
JP-480ST	175	700X500X500	48	2400	6000	28/40
JP-600ST	264	800X600X550	60	3000	6000	28/40
JP-720ST	360	1000X600X600	72	3600	9000	28/40
JP-1108ST	540	1000X900X600	108	5400	18000	28/40
JP-1144ST	960	1200X1000X800	144	7200	27000	28/40

Cleaning Effect:



Before



After



Before



After

#### Main performance characteristics

The washing machine is operated by single chip software.

The cleaning machine's sound reduction cover and cleaning tank are made of high quality stainless steel.

The washing machine has good sealing performance and has sound insulation and heat insulation effect.

Digital display over temperature, over voltage, over current, low water level, no solution protection indication.

Digital memory, setting display ultrasonic working time, ultrasonic power, liquid level (and actual liquid level), heating temperature (and actual temperature).

The cleaning machine circuit has an automatic frequency sweep function, which can generate a continuous pulse jet, which makes the cleaning effect more obvious and the work is more stable.

The cleaning circuit and device are upgraded and matched, and the power conversion rate is high and the reactive power loss is low.



**Skymen Technology Corporation Limited**



86-755-27094405



info@skymen.cc



skymenultrasonic.com

Floor 1st & 2nd, Building 3, Tanggang Taifeng Industrial Park, Dawangshan Community, Shajing Street, Bao'an District, Shenzhen