

45KHz SUS304 Double Frequency Ultrasonic Bath 600W For Degreasing

Basic Information

Place of Origin: ChinaBrand Name: Skymen

Certification: CE ROHS FCC SGS
 Model Number: JM-30D-45/80
 Minimum Order Quantity: 1 unit
 Price: Negotiation

Packaging Details: 1 unit per boxDelivery Time: In Stock

• Supply Ability: 800 pcs per month



Product Specification

Model: JM-30D-45/80
Frequency: 45/80KHz
Capacity: 7.93 Gallon
Tank Size: 20*12*7.8 Inch
Ultrasonic Power: 0~600W
Heating Power: 800W
Material: SUS304

• Highlight: SUS304 Double Frequency Ultrasonic Bath,

17KG

45KHz Double Frequency Ultrasonic Bath, 600W Degreasing Ultrasonic Cleaner



More Images

G.W:



Product Description

Double Frequency Digital Ultrasonic Bath For Degreasing And Rust Removal Before Electroplating

	trasonic Bath For Degreasing And Rust Removal Before Elec				
Model	JM-30D-45/80				
Ultrasonic Frequency	45/80KHz				
Transducer Quantity	10pcs				
Ultrasonic Power	0~600W				
Heating Power	800W				
Tank Capacity	30L/7.93Gallon				
Tank Size	500*300*200mm				
Machine size	585*330*230mm				
Packing size	690*460*420mm				
Net weight	16KG				
Gross weight	17KG				
Time Range	0~99 Hours				
Temperature Range	Room temperature~80 /176				
Tank material	SUS 304				
Tank thickness	1.1mm				
Shell thickness	0.8mm				
Slope panel degree	20°				
Noisy	Mute				
Sweep frequency	√				
Drain Valve	/				
General switch	/				
Degas	/				
Semi-wave	/				
Lid	/				
Basket	·				
Voltage	110V; 220V				
Plug	European Plug; US plug; Austrslian Plug; British Plu				
Detergent suggestion	No stronger acid or alkali				
OEM	Yes				
OEM MOQ	20pcs				
Origin	Guangdong China				
Business category	Manufacturer				
Lead time	7 days after payment if order quantity is below 20pcs				
Payment term	By cash; by credit card; by Paypal				
Warranty	1 year				

The cleaning effect of dual-frequency ultrasonic cleaning machine is located in various industries

Dual-frequency ultrasonic cleaning machine Among all the cleaning methods, the dual-frequency ultrasonic cleaning machine is the one with high efficiency and good effect. The reason why the dual-frequency ultrasonic cleaning machine can achieve this effect is due to its unique working principle and cleaning method. Closely related. We know that in production and life, there are many things that need to be cleaned, and there are many types and links that need to be cleaned, such as: removing contaminants from objects, dredging small holes, and common manual cleaning methods are undoubtedly impossible for special-shaped objects and hidden parts of objects. To meet the requirements, even steam cleaning and high-pressure water jet cleaning cannot meet the demand for higher cleanliness. The dual-frequency ultrasonic cleaning machine can also kill bacteria, dissolve organic pollutants, and prevent over-corrosion. Frequency ultrasonic cleaners are increasingly widely used in various industries:

Product Show:



PAY ATTENTION ON DETAILS



Insulated handle design

Anti-static and anti-high temperature, more secure







Stainless steel drain valve

One-half inch large drain valve, quicker to drain







Cooling vents

Fast heat dissipation, protecting the circuit board and enhancing the service life








Heat - resistant power cord

One-half inch large drain valve, quicker to drain



Non-slip anti-shock pad

Non-slip, safer

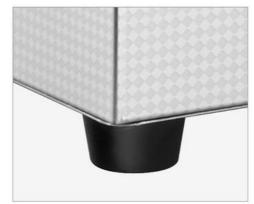






Safety switch


With ground insurance switch



Stainless steel cleaning basket

Fine workmanship and durability



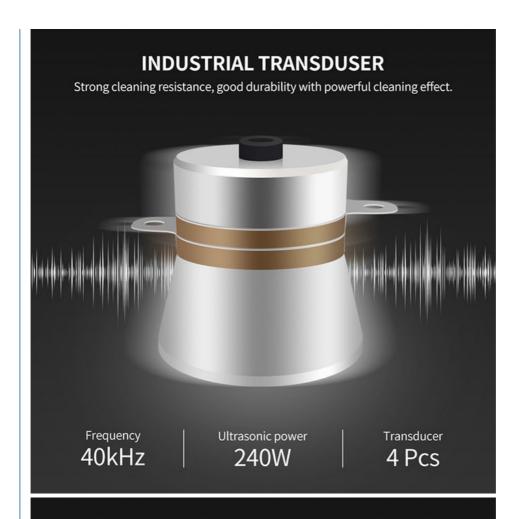

HEATING SYSTEM

Built-in heating board, You can adjust the heating water temperature from 20 to 80°C. It's efficient to remove oil and wax



HEATING BOARD



Heating temperature 20-80°C



Heating power 200W



Application Area:

MULTIPURPOSE CLEANING

It's efficient for most of household items that could be used to clean. get the best cleaning effects with the least effort.























COMPARISON OF CLEANING EFFECT




























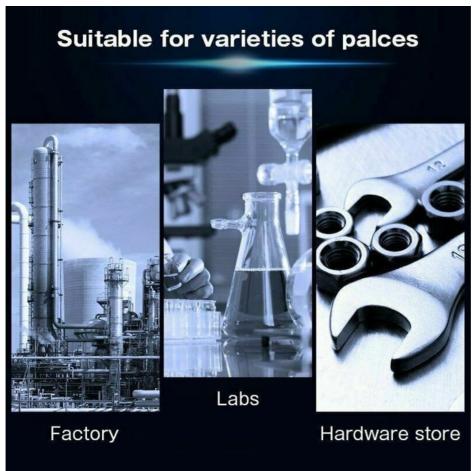



Before

Industrial Ultrasonic Cleaning Machine



Model	Capacit y	Tank Size	Transducer s	Ultrasonic Power	Heating Power	Tank thickness	Frequency
	(L)	(L*W*H)mm	(pcs)	(W)	(W)	(mm)	(KHz)
JP-120ST	38	500X300X250	12	600	1500	2	28/40
JP-180ST	53	500X350X300	18	900	1500	2	28/40
JP-240ST	77	550X400X350	24	120	3000	2	28/40
JP-300ST	99	550X450X400	30	1500	3000	2	28/40
JP-301ST	99	800X300X400	30	1500	3000	2	28/40
JP-360ST	135	600X500X450	36	1800	4500	2	28/40
JP-480ST	175	700X500X500	48	2400	6000	2	28/40
JP-600ST	264	800X600X550	60	3000	6000	2	28/40
JP-720ST	360	1000X600X600	72	3600	9000	2	28/40
JP- 1108ST	540	1000X900X600	108	5400	18000	2	28/40
JP- 1144ST	960	1200X1000X800	144	7200	27000	2	28/40

Immersible Transducer Plate Image:





Model	Plate Size	Transducer s	Ultrasonic Power	Generator	Suitable tank
	(L*W*H)mm	(pcs)	(W)	(set)	(L)
JP-1006I	305*205*100	6	300	1	10~15
JP-1012I	355*305*100	12	600	1	30~40
JP-1018I	340*280*100	18	900	1	60~70
JP-1024I	430*280*100	24	1200	1	70~80
JP-1030I	460*370*100	30	1500	1	90~100
JP-1036I	550*450*100	36	1800	1	130~140
JP-1048I	600*450*100	48	2400	2	170~180

Immersible Transducer Tube

Image:



Model	Tube Size	Transduce	Ultrasonic Power	Generat	Length of wire	
		rs		or		
	(D*H)mm	(pcs)	(W)	(set)	(M)	
JM-1003	57*180	3	150	1	1.5	
JM-1006	57*300	6	300	1	1.5	
JM-1012	57*550	12	600	1	1.5	
JM-1018	57*750	18	900	1	1.5	
JM-1024	57*1000	24	1200	1	1.5	
JM-1036	57*1520	36	1800	1		

Immersible Transducer Plate/tube can be put in any tank, but it doesn't have heating function.

The price of tube is much higher than plate, Ultrasonic Tube is only used for special purpose, such as in Lab.



Skymen Technology Corporation Limited



86-755-27094405



info@skymen.cc



skymenultrasonic.com

Floor 1st & 2nd, Building 3, Tanggang Taifeng Industrial Park, Dawangshan Community, Shajing Street, Bao'an District, Shenzhen